

THE DETERMINATION OF THE CYCLOID PROFILE' LIMITS OF THE CYCLOID REDUCER' SATELLITE GEAR

Anamaria DĂSCĂLESCU

Assoc. Prof. Ing. PhD, The North University of Baia Mare,
e-mail anamaria13dascalescu@yahoo.com

Key words: pressure angle, reaction values, tooth addendum and tooth dedendum circle radius,

1. INTRODUCTION

The pressure angle between a roller tooth and the cycloid profile represents an essential indicator on the estimation process of the energetic flux transmission (forces). The satellite gear' cycloid profile optimization takes into account the variation of this angle during a cycle of gearing of a roller tooth. When the pressure angle is zero, or has small values, the energetic flux transmission is carry out in good condition.

Based on the transmission angle $\gamma(\varphi)$ variations' graphs, we conclude that the central interval of the cycloid profile of a tooth, between 13° - 119° , is favorable to the transmission of the forces and the beginning / ending part of the cycloid profile of a tooth corresponds to some transmission angle unacceptable for the forces.

The analyze of the R_{12} , R_{32} , R_{42} reactions' variation graphs show us that, theoretically, the reactions are infinite at the beginning / ending of the gearing of the sun gear roller tooth with the satellite gear cycloid profile. The reactions decrease in the central part of the active profile and, practical, became constant on the interval $\varphi = 20^\circ$ - 120° .

By dynamical point of view, on the forces transmission is not rational to use the entire length of the cycloid profile. The cycloid profile' favorable interval to transmit the forces is delimited by the tooth addendum circle with r_a radius and the tooth dedendum circle with r_f radius. In the paper, we present the mathematical expressions of these circles. The tooth addendum circle radius, respectively the tooth dedendum circle radius limit the optimal cycloid profile considering the forces transmission favorable angle (fig. 1).

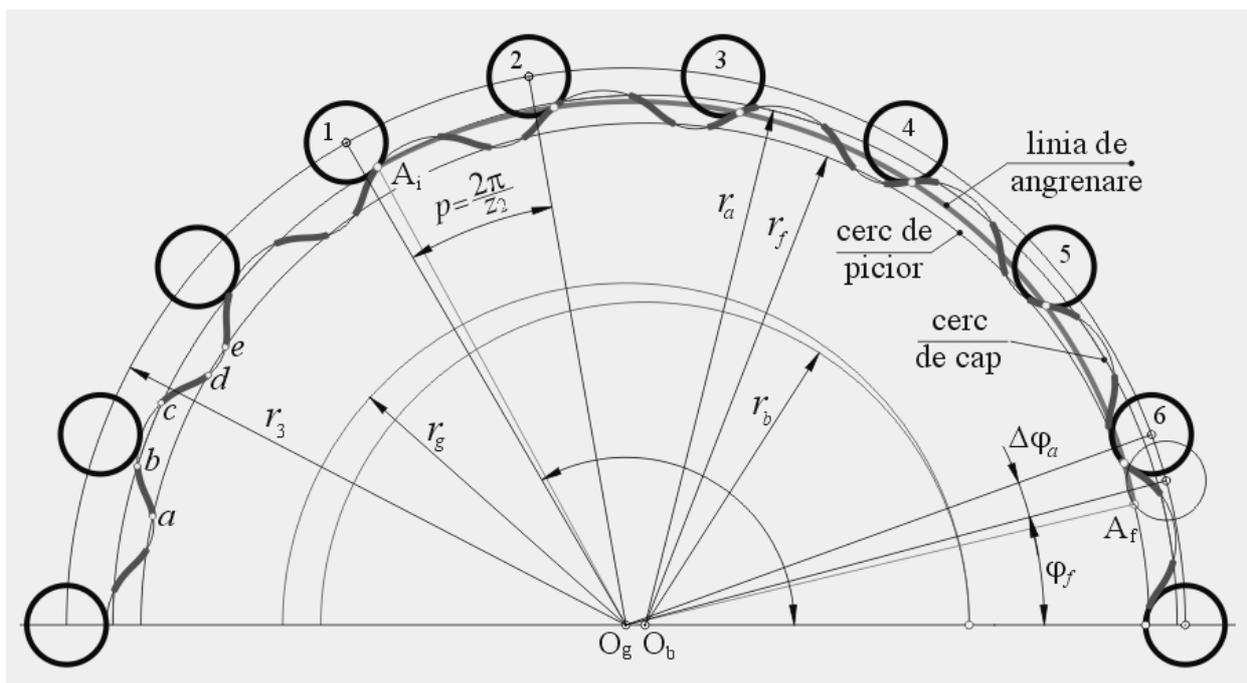


Fig. 1. The circles who limit the optimal cycloid profile.

In figure 1 we present, with thick line, the effectively length of the gearing line between the limits φ_f and $\varphi_a + \varphi_f$. We obtain this shorten length of the gearing line by supplementary manufacturing process of the beginning / ending part of the tooth' active profile. The active interval of the cycloid profile corresponds to **a-b** interval to a direction of rotation, respectively **c-d** to the inverse direction of rotation. The dynamic favorable interval represent $\approx 45\%$ from entire cycloid profile length of a satellite gear tooth.

The usage of the entire length of the gearing line, from $\varphi = 0^\circ \dots 180^\circ$, is not rational, because, at the ending part of the gearing line, the pressure angle increase to 90° (fig. 3 and 5) showing us the existing possibilities of blocking.

2. THE ANALYZE OF THE VARIATION OF THE REACTIONS WHO ACTS ON THE SATELLITE GEAR. THE ANALYZE OF THE PRESSURE ANGLE

Based on the determination relations of the reactions' values, we present the variation of the $R_{12}(\varphi)$, $R_{32}(\varphi)$ și $R_{42}(\varphi)$ reactions who act on the satellite gear, calculated in MathCAD utilitarian program, for different position of the satellite gear expressed by the rotation angle of the centroides tangent point, φ , (fig. 2, 4).

The study includes determinations on two types of cycloid reducer with roller teeth: **M1C-23** with gear ratio $i_r = z_1 = 17$, number of roller teeth $z_2 = 18$, eccentricity $a = 2,4$ [mm], driving engine power $P = 1,1$ [kW], the driving engine' nominal speed $n_m = 1500$ [rot/min] and the roller tooth diameter $d_{bo} = 10$ [mm], respectively **RPR - 150** with gear ratio $i_r = z_1 = 25$, number of roller teeth, $z_2 = 26$, eccentricity $a = 2$ [mm], driving engine power $P = 1,5$ [kW], the driving engine' nominal speed $n_m = 1500$ [rot/min] and the roller tooth diameter $d_{bo} = 12$ [mm].

We present the graphs of the R_{12} , R_{32} , R_{42} reactions' variations, figures 2 and 4, calculate in hypothesis I (each satellite gear gears with a roller tooth and a thumb -of the transversally coupling- on the entire length of the gearing line). Analyzing the reactions graphs, we conclude that, in the beginning / ending of the roller tooth gearing with the cycloid profile, theoretical, the reactions are infinite and decrease on the central interval of the active profile, practical being constant on the interval $\varphi = 20^\circ - 120^\circ$.

The accepted values of the transmission angle we consider to be until 50° , and these accepted values are situated between the limits $12,951^\circ$ and $112,951^\circ$ of the angle φ for the first analyzed reducer, respectively $16,768^\circ$ and $116,768^\circ$ of the angle φ for the second analyzed reducer.

The variations of the pressure angle are presented in figures 3, 5. Analyzing the graphs of transmission angle variations $\gamma(\varphi)$ (fig. 3 and 5), we consider that the central interval of the cycloid profile limited by $13^\circ - 119^\circ$ is favorable to the forces transmission. The beginning / ending of the cycloid profile correspond to some transmission angles unacceptable for the forces.

$$\begin{aligned}
 z_1 &:= 17 & r_g &:= 43.2 & r_b &:= 40.8 & a &:= 2.4 & e_x &:= 1.63 & M_1 &:= 739 & r_{bo} &:= 5 & r_3 &:= 70.398 & r_4 &:= 45 \\
 \varphi_r(\varphi) &:= \varphi \cdot \frac{\pi}{180} & \rho(\varphi) &:= r_g \cdot \sqrt{e_x^2 + 1 - 2e_x \cos(\varphi_r(\varphi))} - r_{bo} & \theta(\varphi) &:= \arcsin\left(\frac{r_3 \cos(\varphi_r(\varphi)) - r_g}{\rho(\varphi) + r_{bo}}\right) \\
 R_{32}(\varphi) &:= \frac{10M_1 \cdot \sqrt{e_x^2 + 1 - 2e_x \cos(\varphi_r(\varphi))}}{2 \cdot a \cdot e_x \cdot \sin(\varphi_r(\varphi))} & R_{42}(\varphi) &:= \frac{10M_1}{2a} \cdot \frac{r_b}{r_4 \cdot \sin\left(\frac{r_g}{r_b} \cdot \varphi_r(\varphi)\right)} & R_{12x} &:= \frac{10M_1}{2a} \\
 R_{12}(\varphi) &:= \frac{10M_1}{2 \cdot a} \cdot \sqrt{1 + \left(\frac{2 \cdot a \cdot F_c}{10M_1} + \frac{e_x \cos(\varphi_r(\varphi)) - 1}{e_x \sin(\varphi_r(\varphi))} - \frac{r_b}{r_4 \cdot \sin\left(\frac{r_g}{r_b} \cdot \varphi_r(\varphi)\right)} \right)^2} & \varphi &:= 0..180 & R_{12x} &:= 1539.368 \text{ N}
 \end{aligned}$$

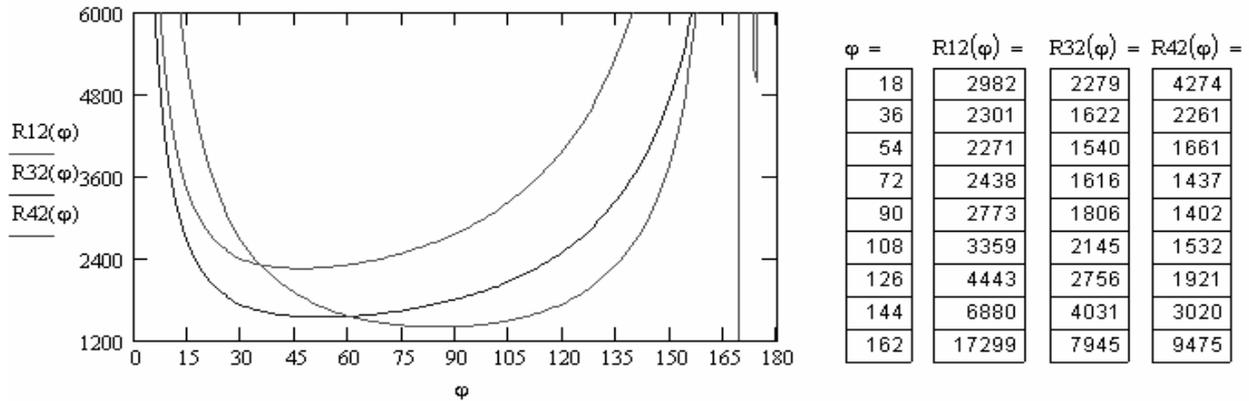


Fig. 2. The $R_{12}(\varphi)$, $R_{32}(\varphi)$ și $R_{42}(\varphi)$ reactions graphs who act on the cycloid satellite gear corresponding to cicloyd reducer M1C-23

$z_1 := 17$ $r_g = 43.2$ $r_b = 40.8$ $a = 2.4$ $ex = 1.63$ $r_{bo} = 5$ $r_3 = 70.398$ $r_4 = 45$
 $\varphi r(\varphi) := \varphi \cdot \frac{\pi}{180}$ $\rho(\varphi) := r_g \cdot \sqrt{ex^2 + 1 - 2ex \cdot \cos(\varphi r(\varphi))} - r_{bo}$ $\gamma(\varphi) := \text{asin}\left(\frac{r_3 \cdot \cos(\varphi r(\varphi)) - r_g}{\rho(\varphi r(\varphi)) + r_{bo}}\right) \cdot \frac{180}{\pi}$ $\varphi := 0..180$

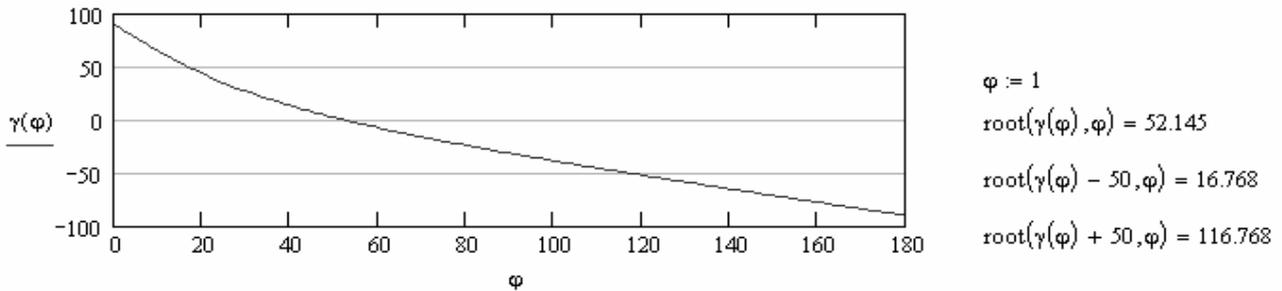


Fig. 3. The variation of the pressure angle corresponding to M1C-23

$z_1 := 25$ $r_g = 52$ $r_b = 50$ $a = 2$ $ex = 1.413$ $M_1 = 981$ $r_{bo} = 5$ $r_3 = 73.502$ $r_4 = 44$
 $\varphi r(\varphi) := \varphi \cdot \frac{\pi}{180}$ $\rho(\varphi) := r_g \cdot \sqrt{ex^2 + 1 - 2ex \cdot \cos(\varphi r(\varphi))} - r_{bo}$ $\theta(\varphi) := \text{asin}\left(\frac{r_3 \cdot \cos(\varphi r(\varphi)) - r_g}{\rho(\varphi) + r_{bo}}\right)$
 $R_{32}(\varphi) = \frac{10M_1 \cdot \sqrt{ex^2 + 1 - 2ex \cdot \cos(\varphi r(\varphi))}}{2 \cdot a \cdot ex \cdot \sin(\varphi r(\varphi))}$ $R_{42}(\varphi) = \frac{10M_1}{2a} \cdot \frac{r_b}{r_4 \cdot \sin\left(\frac{r_g}{r_b} \cdot \varphi r(\varphi)\right)}$ $R_{12x} = \frac{10M_1}{2a}$
 $R_{12}(\varphi) = \frac{10M_1}{2 \cdot a} \cdot \sqrt{1 + \left(\frac{2 \cdot a \cdot F_c}{10M_1} + \frac{ex \cdot \cos(\varphi r(\varphi)) - 1}{ex \cdot \sin(\varphi r(\varphi))} - \frac{r_b}{r_4 \cdot \sin\left(\frac{r_g}{r_b} \cdot \varphi r(\varphi)\right)}\right)^2}$ $\varphi := 0..180$
 $R_{12x} = 2451.342 \text{ N}$

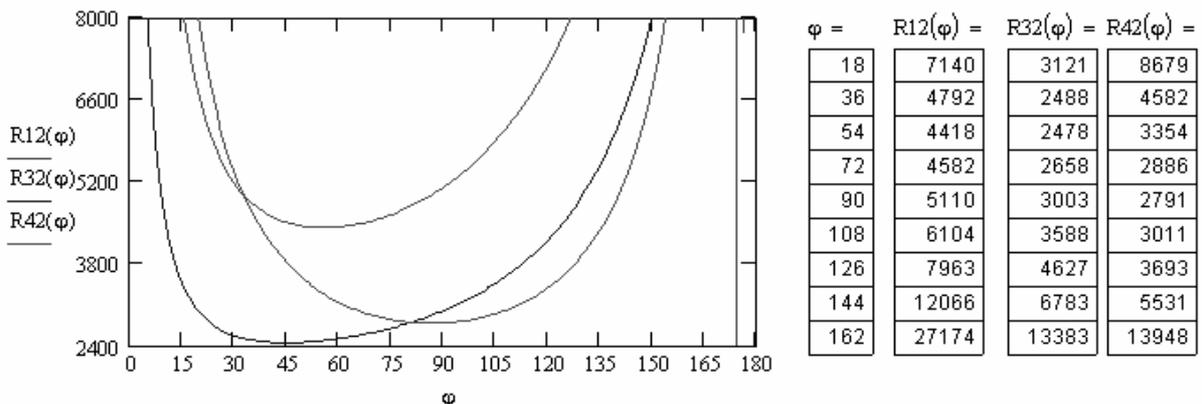


Fig. 4. The $R_{12}(\varphi)$, $R_{32}(\varphi)$ și $R_{42}(\varphi)$ reactions graph who act on the cycloid satellite gear corresponding to cycloid reducer RPR – 150

$$z1 := 17 \quad r_g = 52 \quad r_b = 50 \quad a = 2 \quad ex = 1.413 \quad r_{bo} = 5 \quad r_3 = 73.502 \quad r_4 = 44$$

$$\varphi r(\varphi) := \varphi \cdot \frac{\pi}{180} \quad \rho(\varphi) := r_g \cdot \sqrt{ex^2 + 1 - 2ex \cdot \cos(\varphi)} - r_{bo} \quad \gamma(\varphi) := \operatorname{asin}\left(\frac{r_3 \cdot \cos(\varphi r(\varphi)) - r_g}{\rho(\varphi r(\varphi)) + r_{bo}}\right) \cdot \frac{180}{\pi} \quad \varphi := 0..180$$

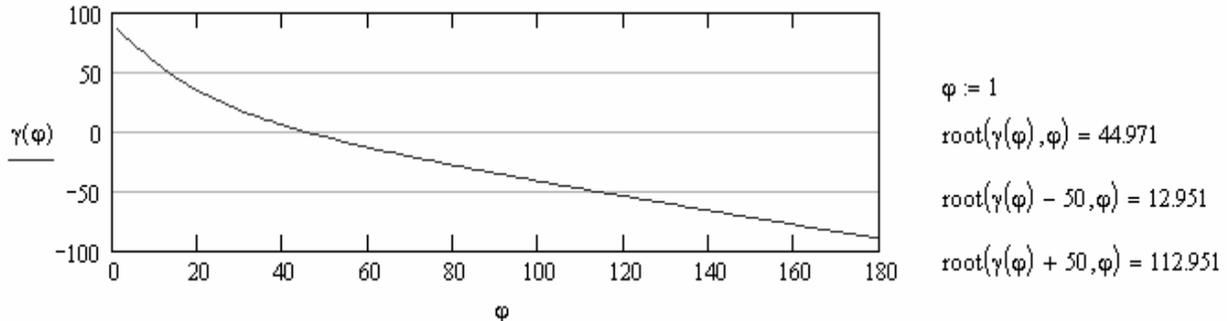


Fig. 5. The variation of the pressure angle corresponding to RPR – 150

We conclude that, from dynamic point of view, to transmit the forces is not rational to utilize the entire length of the cycloid profile

From point of view of the transmission of the forces, the favorable interval of the cycloid profile is limited by the tooth addendum circle with r_a radius and the tooth dedendum circle with r_f radius.

We present the determination relation of these circles' radius values (1.)

$$r_{a,f} = \sqrt{x_{A_{a,f}}^2 + y_{A_{a,f}}^2} \quad (1)$$

where: x_{A_a} and y_{A_a} , respectively x_{A_f} and y_{A_f} , are the coordinate of the gearing entrance point, respectively the coordinate of the gearing exit point of a tooth.

$$x_{A_{a,f}} = r_g - a + \left(\sqrt{r_3^2 + r_g^2 - 2r_3r_g \cos \varphi_{a,f}} - r_{bo} \right) \frac{r_3 \cos \varphi_{a,f} - r_g}{\sqrt{r_3^2 + r_g^2 - 2r_3r_g \cos \varphi_{a,f}}} \quad (2)$$

$$y_{A_{a,f}} = \left(\sqrt{r_3^2 + r_g^2 - 2r_3r_g \cos \varphi_{a,f}} - r_{bo} \right) \frac{r_3 \sin \varphi_{a,f}}{\sqrt{r_3^2 + r_g^2 - 2r_3r_g \cos \varphi_{a,f}}} \quad (3)$$

3. CONCLUSIONS

To use only the dynamic favorable domain of the cycloid profile is possible eliminating the beginning / ending part of the tooth' active profile through decreasing the tooth addendum circle' diameter corresponding to **b-c** interval, respectively through deepening the tooth dedendum profile corresponding to **d-e** interval.

The dynamic favorable interval represent $\approx 45\%$ from entire cycloid profile length of a satellite gear tooth. We obtain this shorten length of the gearing line by supplementary manufacturing process of the beginning / ending part of the tooth' active profile. To use only the dynamic favorable domain of the cycloid profile is possible by elimination of the beginning / ending part of the tooth' active profile through decreasing the tooth addendum circle' diameter, respectively through deepening the tooth dedendum profile.

REFERENCES

[1] Dăscălescu, A.: *Contribution to the Kinematics and Dynamics Studys of the Planetary Gears with Cycloid Tothing and Roller Teeth*, PhD Theses, Cluj-Napoca Technical University, 2005